

"PS" Series Window Film Splicer



Shown: PS 1220-03, Window Film Splicer

14357 Commercial Parkway
South Beloit, IL 61080
Phone: 815-624-8989
Fax: 815-624-4223
Internet: www.keenetech.com
E-mail: info@keenetech.com

**Permits Non-Stop
Envelope Production**

**Eliminates Machine Stops
for Roll Changes**

**Increased Product
Consistency**

Increased Productivity

Reduces Waste

Standard Features:


- Lap Splice, Minimum Loose Tail
- Bi-Directional Unwind Capabilities
- Cantilevered Spindles with Pneumatic Core Chucks
- Direct Roll Loading
- Splice Signal Bell
- Automatic Microprocessor Control
- System Diagnostics
- Digital Autosplice
- Automatic Press Stop (No Prep or Web Break)
- Operation and Maintenance Manuals
- Automatic Microprocessor Control
- Aluminum Tooling Plate Construction

Specifications:

- Web Width: Up to 12 Inch (508 mm)
- Splice Speed: Up to 500 FPM (152 MPM)
- Roll Diameter: Up to 30 Inch (770 mm)
- Roll Weight: Up to 150LBS (60 kg)
- Core Size: 3 Inch (76 mm)

Options:

- Operator Monitor System
- 90° Turnbar and Web Positioner

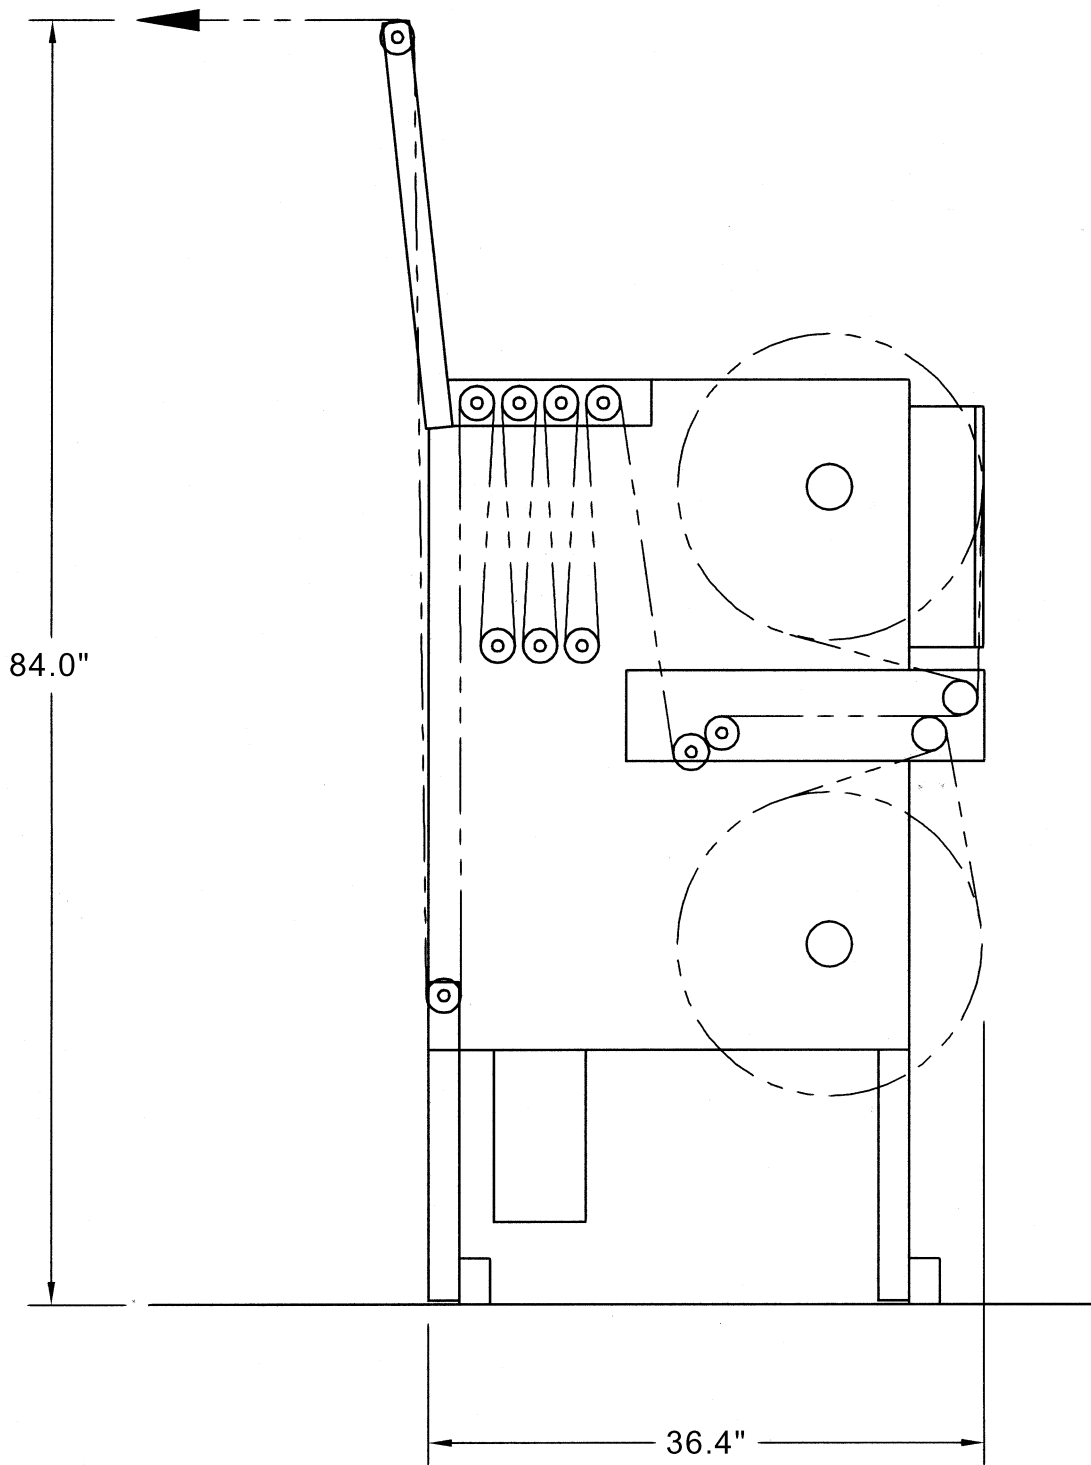

MODEL PS1220-03

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE